


Humidifier Model HFL

Standard Features

All stainless inner Shell
 Low Voltage Controls
 Temperature High Limit
 Feed Water Press. Switch
 Manual Drain

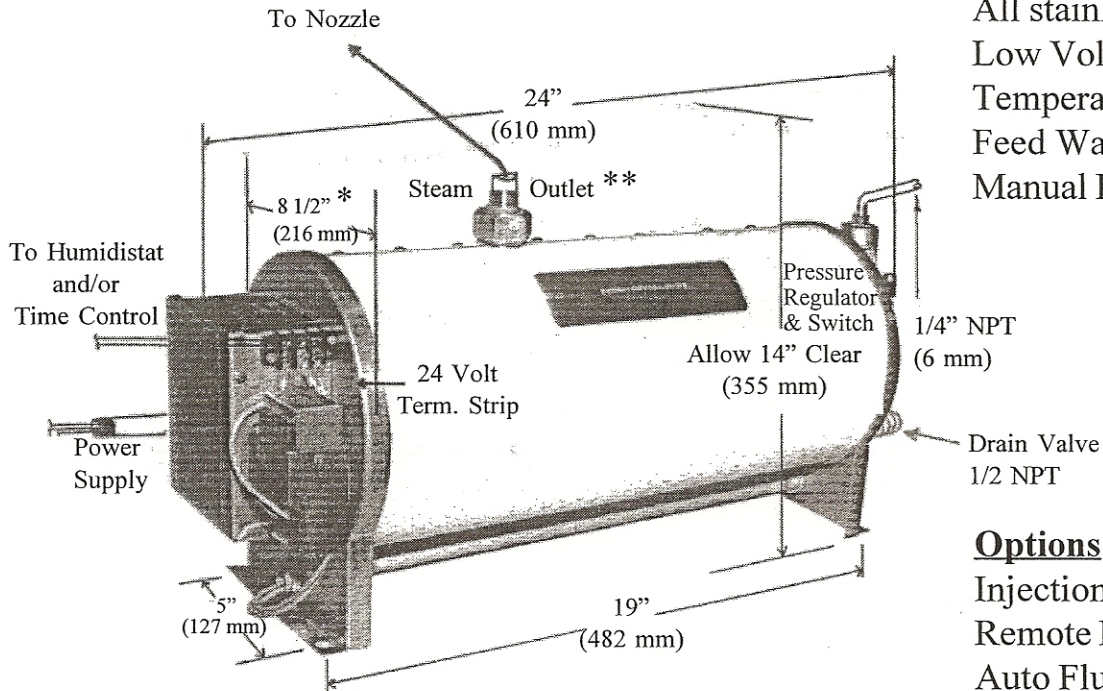

Options

Injection Nozzle
 Remote Humidistat
 Auto Flush System
 Fill Line Strainer

Capacity Table Series HFL

Input KW	Model No			Capacity		AMPS-1 Ph-60 cy.		
	115 Volt	208 Volt	230 Volt	lbs/hr	kgs/hr	115V	208V	230V
1.5	HFL-1X5M1			4.5	2.1	13.0		
2.0	HFL-2M1	HFL-2M8	HFL-2M2	6.0	2.7	17.4	9.6	8.7
3.0		HFL-3M8	HFL-3M2	9.0	4.1		14.4	13.0
4.0		HFL-4M8	HFL-4M2	12.0	5.5		19.2	17.4
5.0		HFL-5M8	HFL-5M2	15.0	6.8		24.0	21.7
DOUBLE CIRCUITED SERIES								
6.0		HFL-2E-3M8	HFL-2E-3M2	18.0	8.2		28.8	26.0
7.0		HFL-2E-3/4M8	HFL-2E-3/4M2	21.0	9.6		33.6	30.4
8.0		HFL-2E-4M8	HFL-2E-4M2	24.0	11.0		38.4	34.8
9.0		HFL-2E-4/5M8	HFL-2E-4/5M2	27.0	12.3		43.2	39.1
10.0		HFL-2E-5M8	HFL-2E-5M2	30.0	13.6		48.0	43.4

- * Overall width: 6 to 10 Kw. - 10 1/2"
 ** Steam Outlet: 1 to 5 Kw. - 1/2"
 6 to 10 Kw. - 3/4"

Alladin-Air Manufacturing Ltd.

1111 - 46 Avenue S.E.
 Calgary, Alberta T2G 2A5
 Phone: (403) 243-2923
 Fax: (403) 287-9005

19-Jul-96/zs

AA-007