


Steamer Model SFL

Standard Features

- All stainless Inner Shell
- Low Voltage Controls
- Temperature High Limit
- Feed Water Press. Switch
- Feed Water Regulator
- 30 Min. Timer
- Injection Nozzle
- Manual Drain

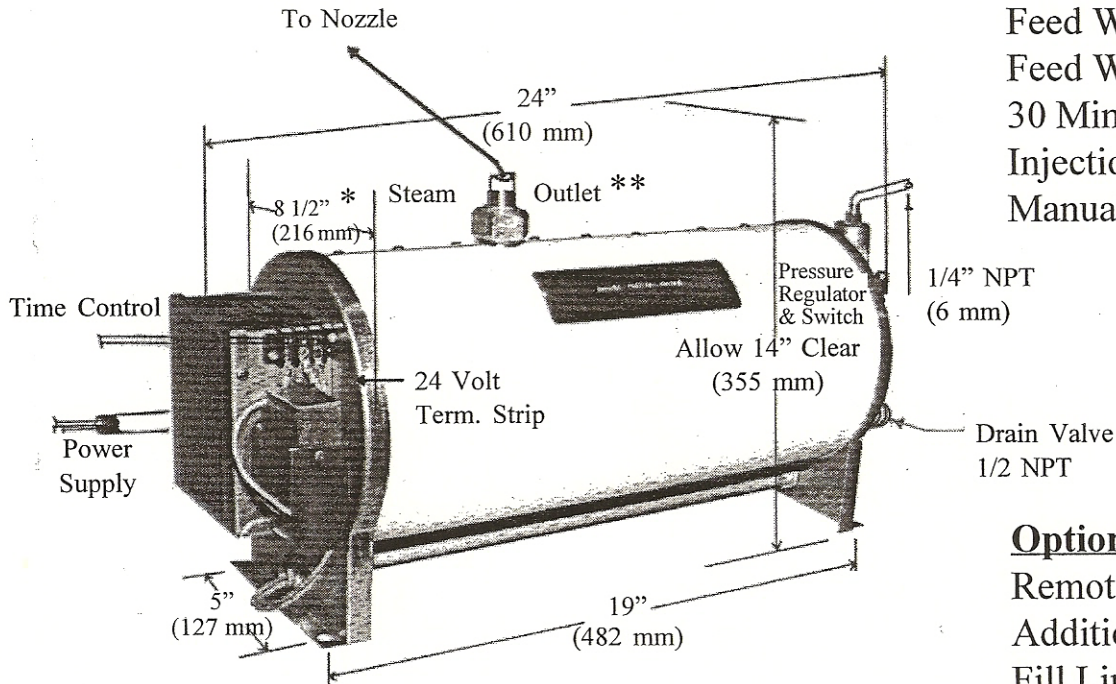

Options

- Remote Thermostat
- Additional Nozzles
- Fill Line Strainer
- Auto Flush System

Capacity Table Series SFL

Input KW	Model No			Capacity		AMPS-1 Ph-60 cy.		
	115 Volt	208 Volt	230 Volt	lbs/hr	kgs/hr	115V	208V	230V
1.5	SFL-1X5M1			4.5	2.1	13.0		
2.0	SFL-2M1	SFL-2M8	SFL-2M2	6.0	2.7	17.4	9.6	8.7
3.0		SFL-3M8	SFL-3M2	9.0	4.1		14.4	13.0
4.0		SFL-4M8	SFL-4M2	12.0	5.5		19.2	17.4
5.0		SFL-5M8	SFL-5M2	15.0	6.8		24.0	21.7
DOUBLE CIRCUITED SERIES								
6.0		SFL-2E-3M8	SFL-2E-3M2	18.0	8.2		28.8	26.0
7.0		SFL-2E-3/4M8	SFL-2E-3/4M2	21.0	9.6		33.6	30.4
8.0		SFL-2E-4M8	SFL-2E-4M2	24.0	11.0		38.4	34.8
9.0		SFL-2E-4/5M8	SFL-2E-4/5M2	27.0	12.3		43.2	39.1
10.0		SFL-2E-5M8	SFL-2E-5M2	30.0	13.6		48.0	43.4

* Overall width: 6 to 10 Kw. - 10 1/2"

** Steam Outlet: 1 to 5 Kw. - 1/2"
6 to 10 Kw. - 3/4"

Alladin-Air Manufacturing Ltd.

1111 - 46 Avenue S.E.
Calgary, Alberta T2G 2A5
Phone: (403) 243-2923
Fax: (403) 287-9005

19-Jul-96/zs

AA-008